


PRE





# SERIE R DUAL

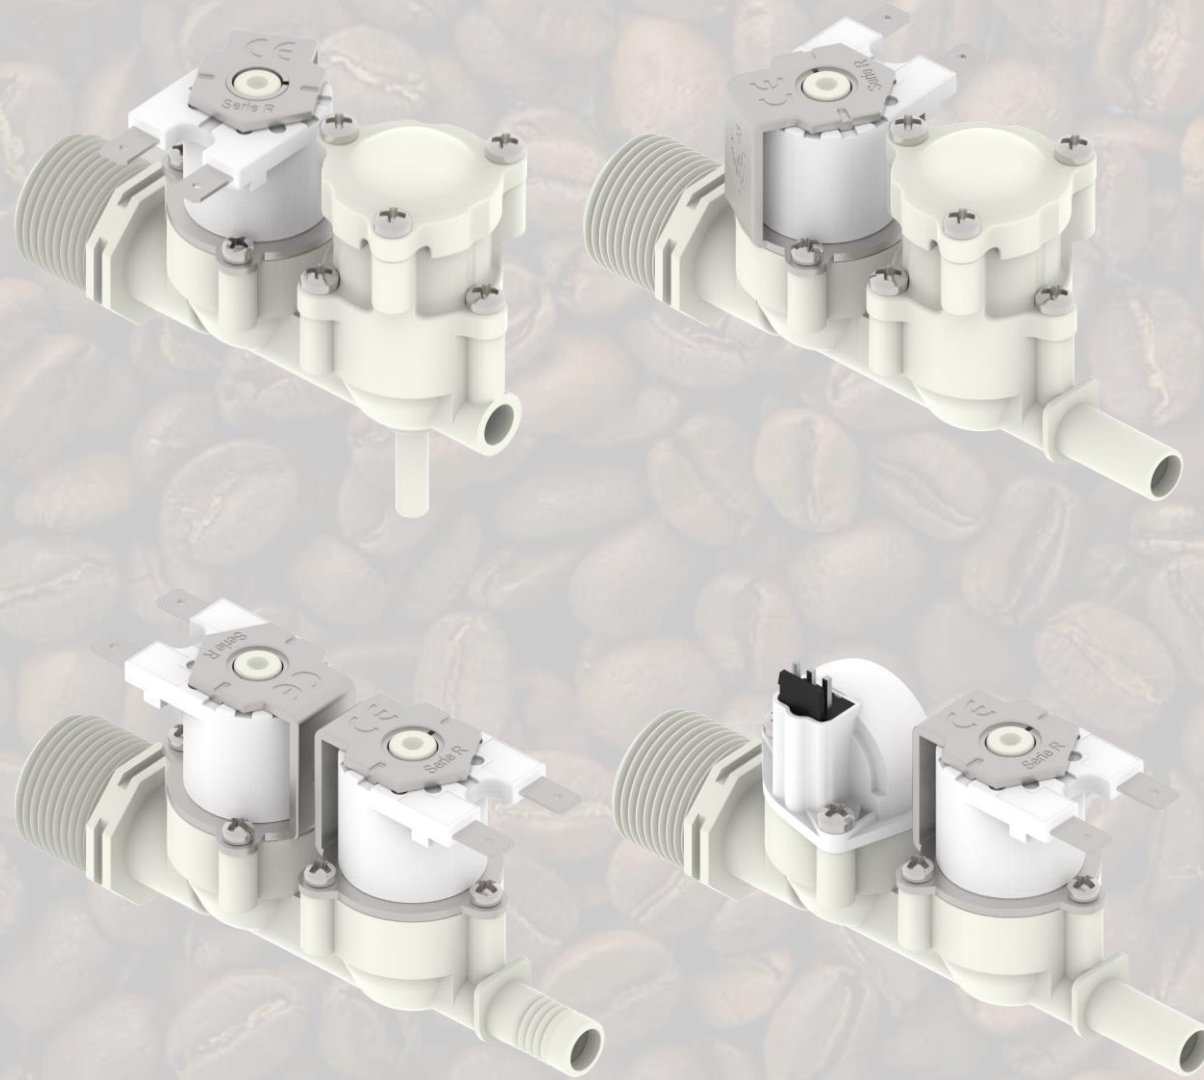



# WORKING CHARACTERISTICS

**Working pressure:** max 10bar



**Room temperature:** 0÷60°C

**Fluid temperature:** 0÷25°C

**Flow direction:** unidirectional

**Nominal diameter:** Ø3.5, 8mm

**Control:** latching, NC, NO

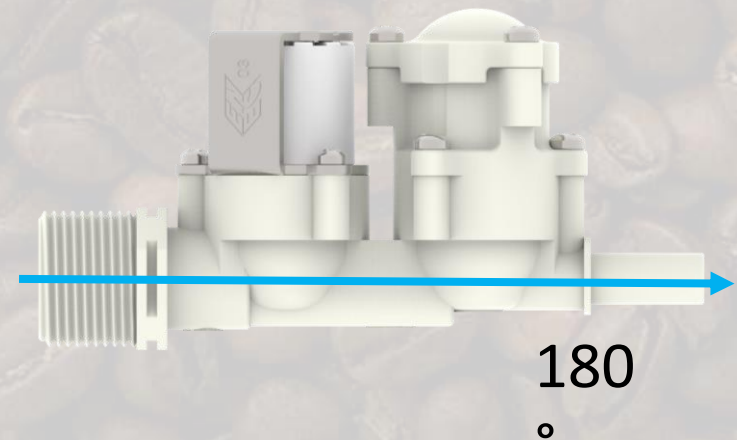
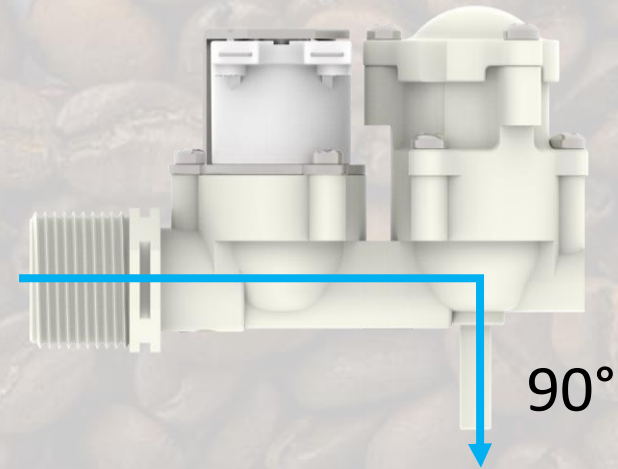






# APPLICATIONS

- Water and sanitary installation
- Coffee machine
- Water dispenser
- Public urinal
- Tap
- Shower

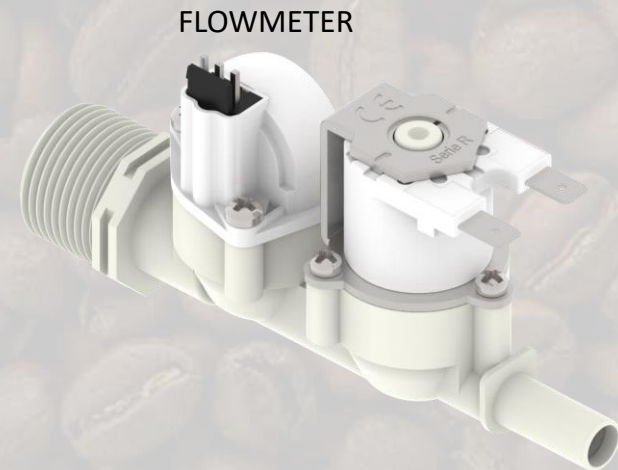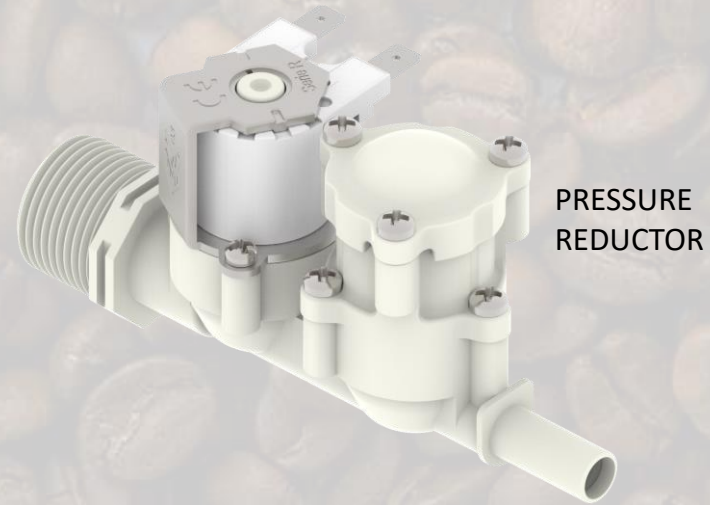



# PHYSICAL CHARACTERISTICS

**Valve body:** PA 66 30% GF

**Diaphragm:** NBR (buna), silicone

**Core:** stainless steel

**Spring:** stainless steel

**Assembly:** with screws







# CONNECTIONS

## Inlet:

BSPP 3/4" male thread

GHT 3/4" male thread

## Outlet 90°:

spigot Ø6,10mm


## Outlet 180°:

spigot Ø1/4",10mm

hosetail Ø10mm



spigot Ø6mm

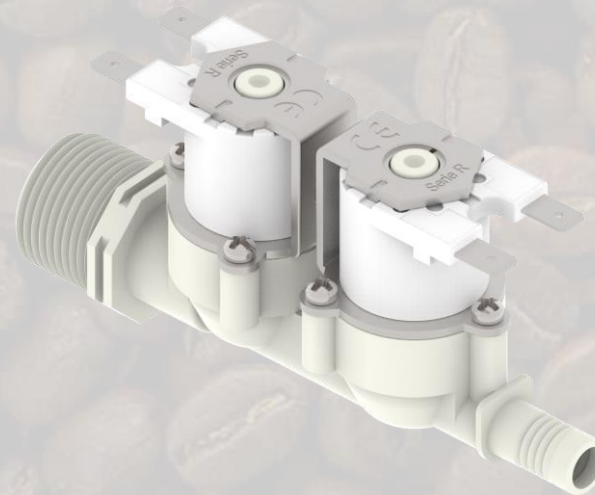

hosetail  
Ø10mm

### INSTALLATION

The valve can be installed in any position without compromising the functioning



# SOLENOID RANGE

- 12V
- 24V
- 110V
- 230V





# MARKS AND CERTIFICATIONS







# THANKS

Nothing great  
has ever been done  
without passion

